THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUGUST ,2005.


LOC	DIST
E	B

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	FIRST ISSUE	17AUG05	JMS	FWK

NOTES

1. (△1) 100 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
2. (△2) SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
3. (△3) Au PLATING OVER Ni PLATING OVER Cu PLATING
4. (△4) Ni PLATING OVER Cu PLATING
5. CHARACTERISTICS
   FREQUENCY RANGE: DC – 4GHz
   NOMINAL IMPEDANCE: 50 OHMS
   WORKING VOLTAGE: 500V RMS
   INSULATION RESISTANCE: 5000 MOHMS
   DIELECTRIC WITHSTAND VOLTAGE: 1500V RMS
   CONTACT RESISTANCE:
   CENTRE CONTACT 1.5 mOHMS
   OUTER CONTACT 0.2 mOHMS
6. MECHANICAL CHARACTERISTICS
   DURABILITY: 50 CYCLES
7. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
8. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

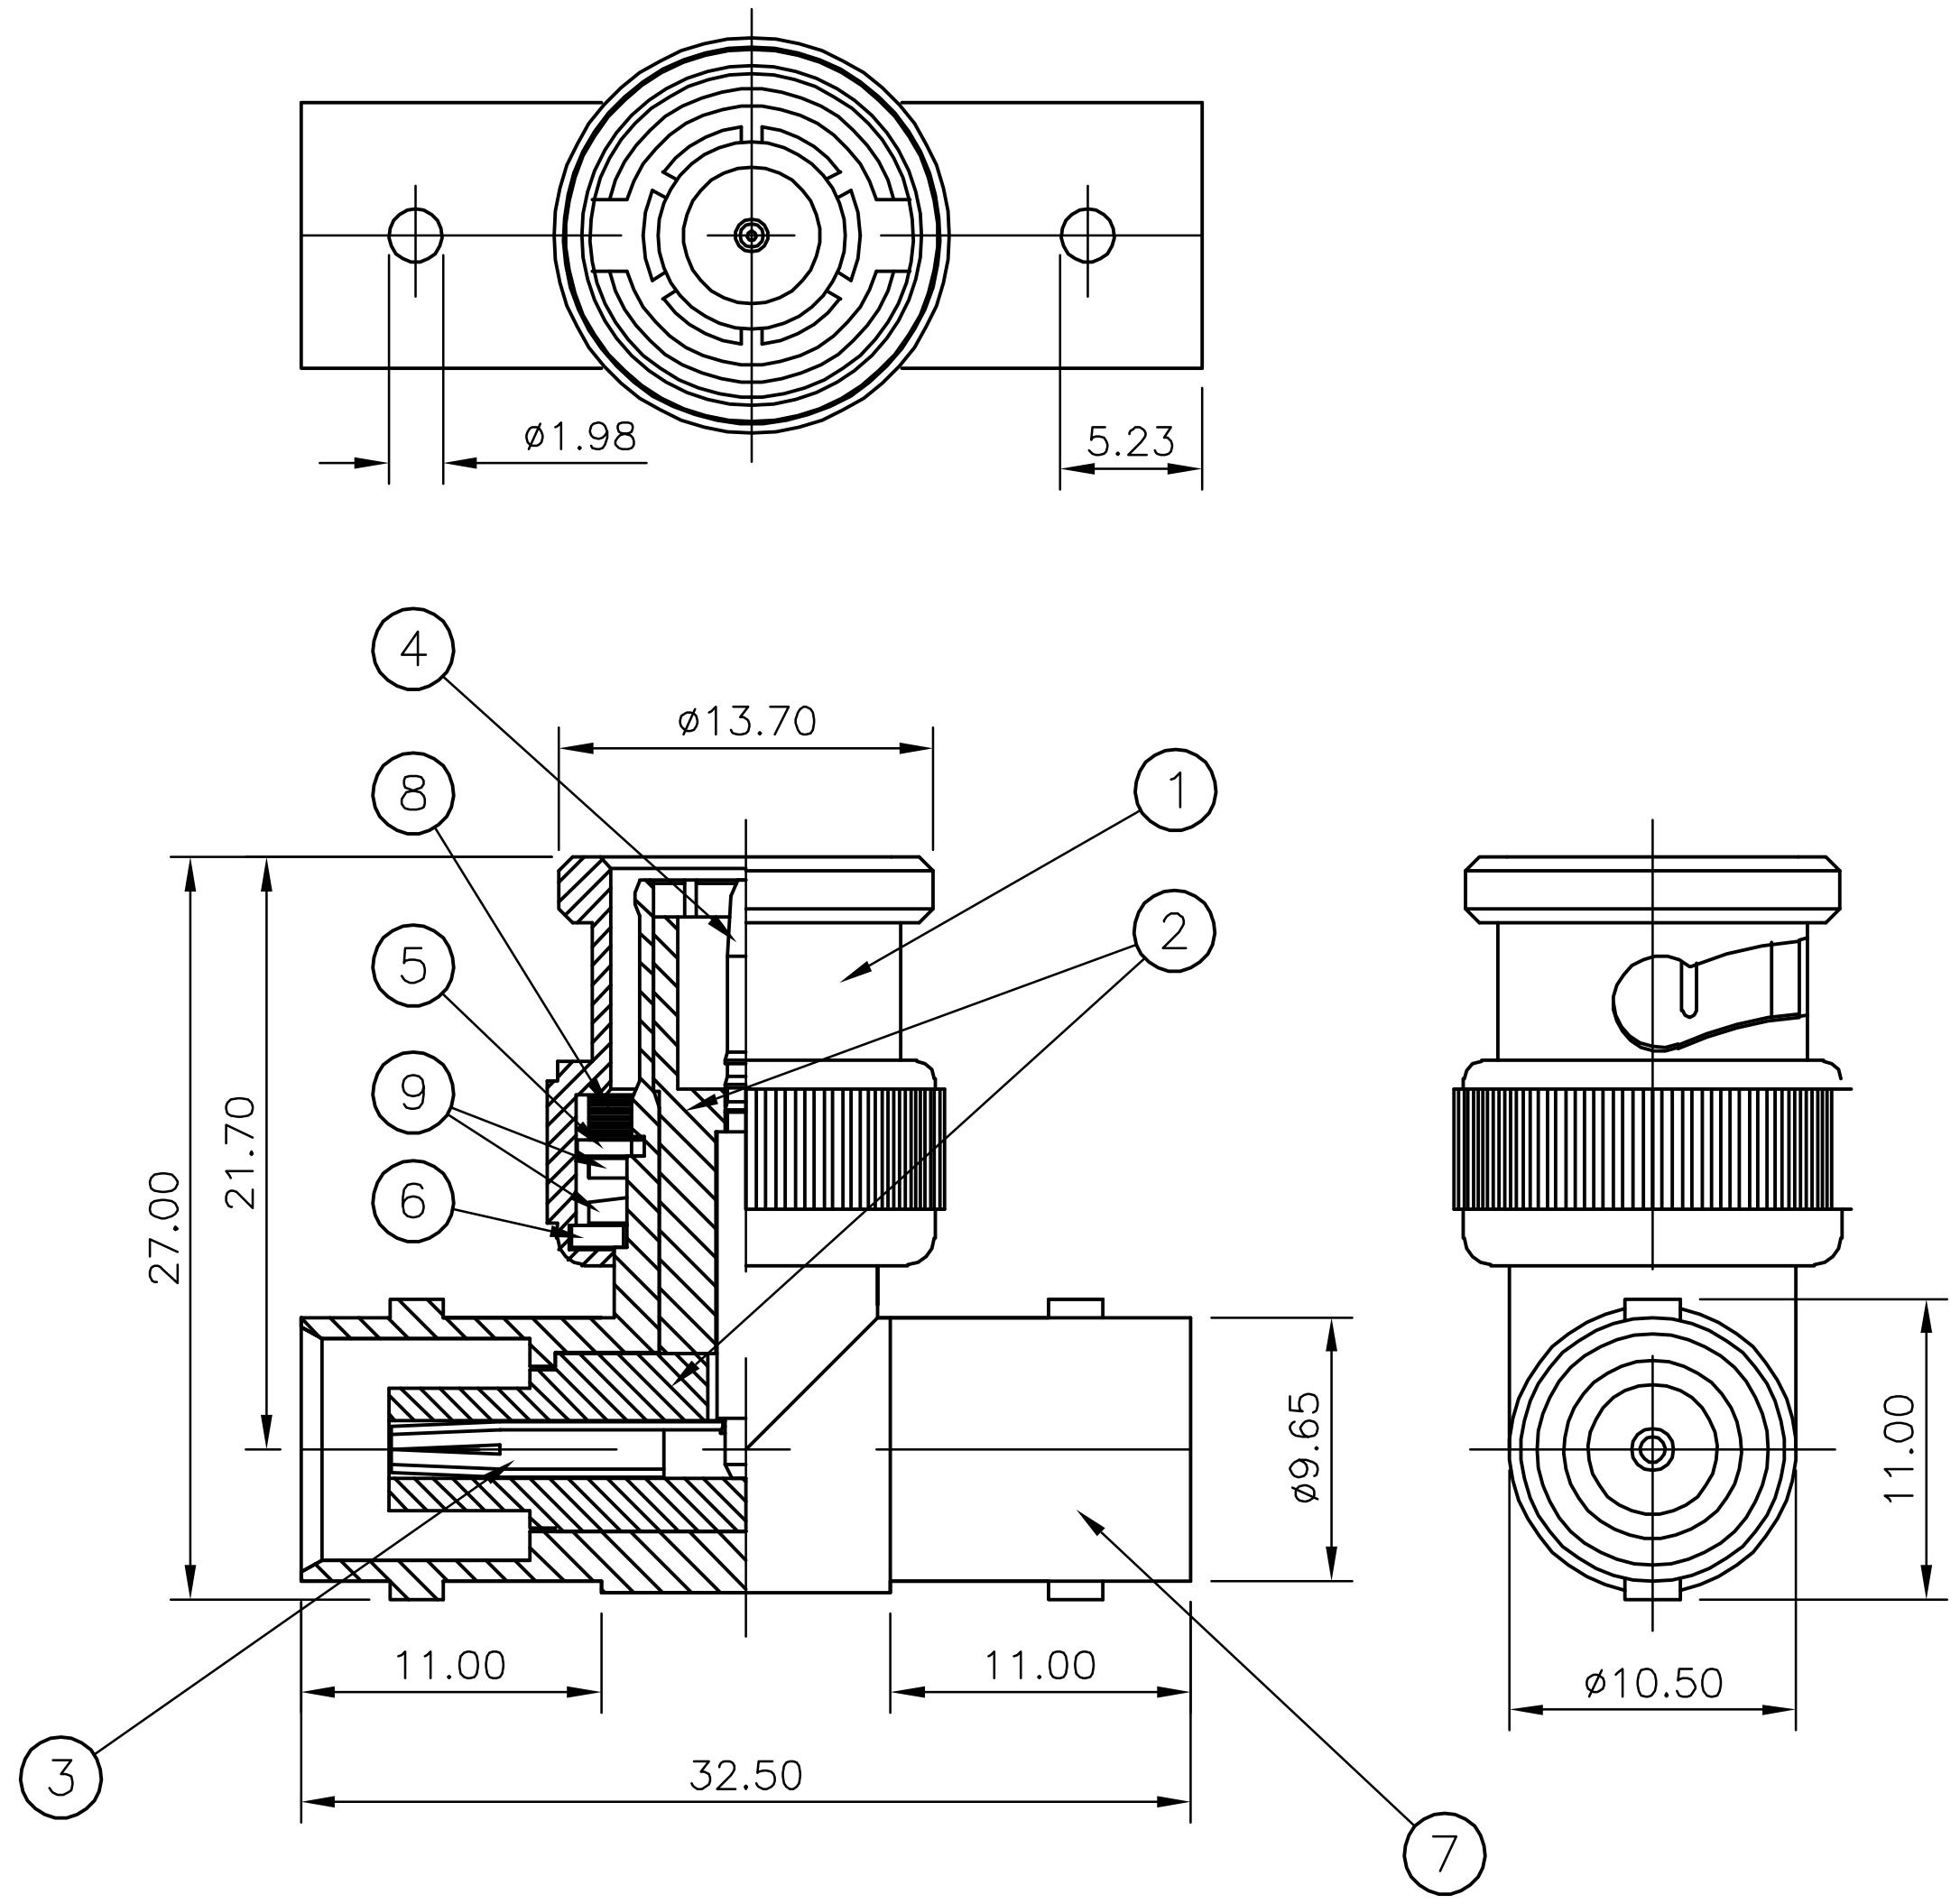

				1	1	SPRING STEEL		SPRING	9
				1	1	SILCON RUBBER		GASKET	8
				1	1	ZINC ALLOY	△4	BODY	7
				1	1	BRASS	△4	WASHER	6
				1	1	BRASS		CIRCLIP	5
				1	1	BRASS	△3	MALE CONTACT	4
				1	1	PHOSPHOR BRONZE	△3	FEMALE CONTACT	3
				2	2	PE-606		INSULATOR	2
				1	1	ZINC ALLOY	△4	SHELL	1
				5--1	5--0	MATERIAL		DESCRIPTION	ITEM
				△2	△1				
QUANTITY PER ASSY						PARTS LIST			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	J.SANDWELL	17AUG05
CHK	S.PARLOW	17AUG05
APVD	F.WHEELER-KING	17AUG05
PRODUCT SPEC	108-3435	
APPLICATION SPEC	N/A	
WEIGHT	–	

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE

FINISH: SEE TABLE

tyco Electronics

Tyco Electronics Corporation
Bideford, UK, EX39 4HE

NAME: BNC T-ADAPTOR
50 OHMS
–

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1634532	–

CUSTOMER DRAWING

SCALE	SHEET	REV
NTS	1 OF 1	A

AMP 1470-19 REV 31MAR2000